

Hood type dishwasher for straight through or corner operation, capacity 60 racks, 1080 plates or 2160 glasses per hour.




**Product Advantages:**

- ready to install, incl. fill and drain hoses, power cord, non-return valve
- completely equipped with rinse pressure pump, drain pump and with rinse agent dispenser
- optimum service accessibility
- optimum hygienic safety by deep drawn tank with rounded edges and self cleaning cycle
- hood closed on all sides
- electronic control with colour coded status indication and ergonomic position of the control panel
- GENIUS-X fine filter system: achieving better wash results due to permanent filtration of wash water – saving energy and detergent

**Option: Tabling**

**Technical Data**

① flexible drain hose 1500 mm	24mm inner / 28mm outer diam.
② fresh water connection: pressure hose 1500 mm flow pressure	R 3/4" inside 0,5 - 10 bar max 60°C
③ power cord	1500 mm
④ hoses for detergent (optional) ⑤ and rinse agent	1500 mm each
cycle times <sup>1)</sup>	60 sec. 90 sec. 120 sec.
water consumption	3,2 l / rack
tank capacity	30 l
tank heating	0,5 kW
power supply	400 / 50 / 3 / N
booster loading	9 kW
total loading	9,9 kW / 3x20 A
pump capacity	0,73 kW / 370 l/min.
loading height	440 mm
noise level	63 dB(A) 60 dB(A) insul.
weight net	appr. 120 kg

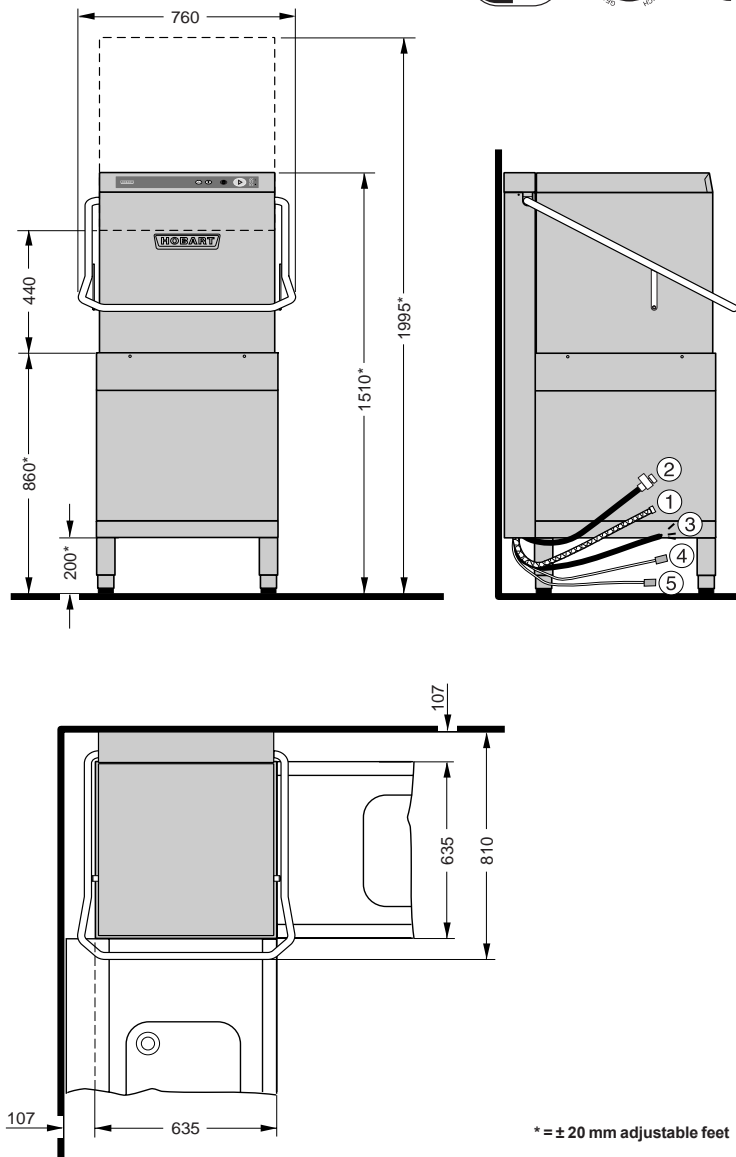

\* = ± 20 mm adjustable feet

Water hardness should not exceed 3°dH, if higher we recommend using a water softener. If mineral content is high a demineraliser may be advisable.

<sup>1)</sup> To reach set rinse temperatures even with cold water connection, the actual cycle-times extend accordingly.