

Hood type dishwasher for straight through or corner operation, capacity 70 racks, 1260 plates or 2520 glasses per hour.




Option: Tabling

Product Advantages:

- high performance Turbolator wash system
- additional endless cycle
- ready to install, incl. fill and drain hoses, power cord, non-return valve
- completely equipped with rinse pressure pump, drain pump and with rinse agent dispenser
- optimum service accessibility
- optimum hygienic safety by deep drawn tank with rounded edges and self cleaning cycle
- hood closed on all sides
- electronic control with colour coded status indication and ergonomic position of the control panel
- GENIUS-X fine filter system: achieving better wash results due to permanent filtration of wash water – saving energy and detergent

Technical Data

① flexible drain hose 1500 mm	24mm inner / 28mm outer diam.
② fresh water connection: pressure hose 1500 mm flow pressure	R 3/4" inside 0,5 - 10 bar max 60°C
③ power cord	1500 mm
④ hoses for detergent (optional) ⑤ and rinse agent	1500 mm each
cycle times ¹⁾	52 sec. 75 sec. 120 sec. endless
water consumption	3,2 l / rack
tank capacity	42 l
tank heating	0,5 kW
power supply	400 / 50 / 3 / N
booster loading	18 kW
total loading	19,3 kW / 3x35 A
pump capacity	1,1 kW / 740 l/min.
loading height	440 mm
noise level	65 dB(A) 60 dB(A) insul.
weight net	appr. 130 kg

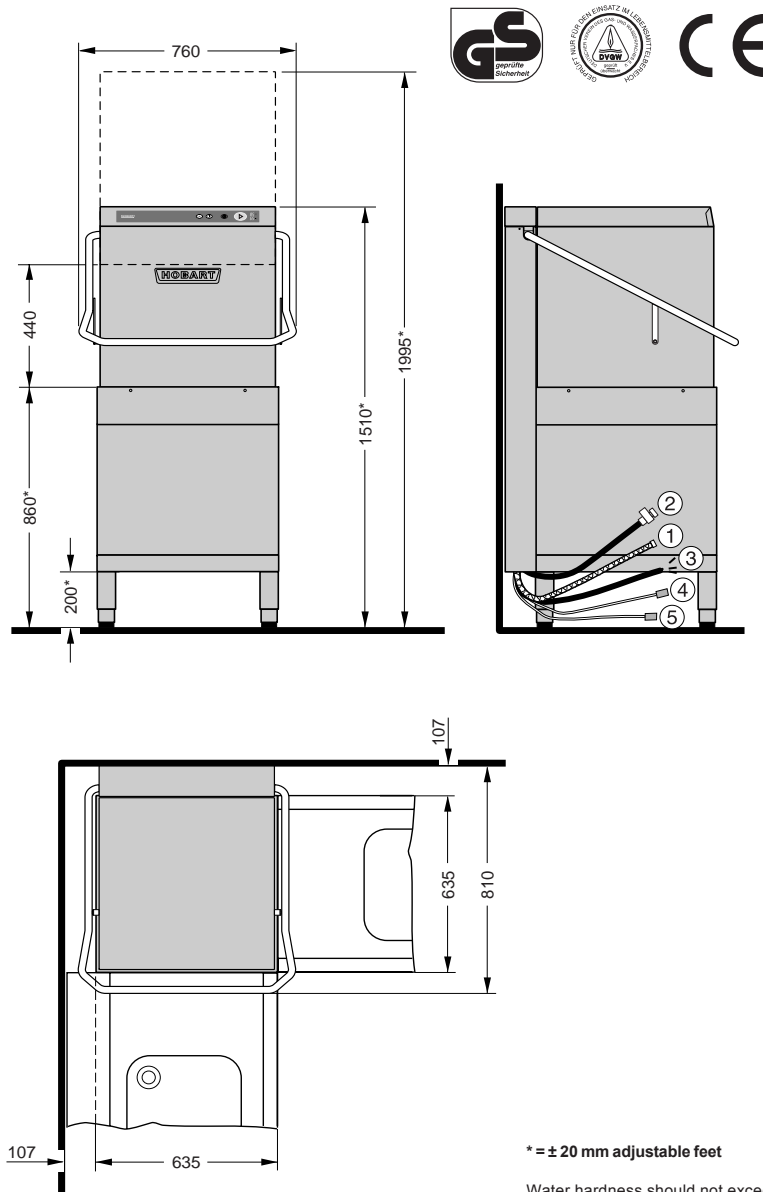

¹⁾ To reach set rinse temperatures even with cold water connection, the actual cycle-times extend accordingly.

* = ± 20 mm adjustable feet

Water hardness should not exceed 3°dH, if higher we recommend using a water softener. If mineral content is high a demineraliser may be advisable.