

# PRO G 600



Gastro Pro  
Gastronorm Upright  
600 Litre Cabinet

## specifications

PRO G 600




### FEATURES & BENEFITS

- Top mounted refrigeration for easy access
- Concealed fan and evaporator for improved safety and more usable space
- Zero ODP refrigerants and insulation
- ECA Approved
- Energy-saving Hydrocarbon refrigerant option
- Minimal noise output, which is important in certain locations
- High refrigeration specification ensures it works in hot kitchens
- Climate Class 5 rating: 43°C ambient
- Simple to use LED temperature display with operating and safety alarms
- Easy to clean, non-rusting 304 grade stainless steel exterior as standard
- Unique fluted trayslides are easy to guide and prevent shelves from tipping
- Lockable castors for easy positioning and cleaning around the cabinet
- 60mm all round insulation maximises energy efficiency
- Impact resistant, removable PVC thermal break helps maintain temperature difference and offers easy access for servicing. Patent Applied No. 0019596.6
- Fully floating lock keep reduces the chance of accidental breakage. Patent Applied No. 0019598.2
- Removable easy clean condenser filter keeps coil in excellent running condition
- Compact refrigeration system featuring easily removable lid for service access. Patent Applied No. 0019600.6
- Completely removable refrigeration plug - fully replaceable

### DIMENSIONS

External Dimensions: 700 x 800 x 2100 (wxdxh) mm  
Depth with door open: 1500 mm

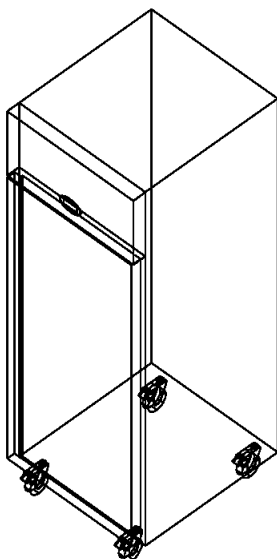

### RANGE

Type	Temp. Range
Model No. refrigerator	PRO G 600 H +1/+4°C
Model No. freezer	PRO G 600 L -18/-21°C
Model No. meat/chill	PRO G 600 M -2/+2°C
Model No. dual temp	PRO G 300/300 HL +1/+4°C / -18/-21°C

# PRO G 600



PRO G 600

## TECHNICAL SPECIFICATION

● standard ○ option

### FINISH

	600 H	600 L	600 M	300/300 HL
aluminium interior/exterior with 304 stainless steel front & interior base	●	●	●	●
304 stainless steel exterior/aluminium interior	○	○	○	○
304 stainless steel exterior/interior	○	○	○	○
complete 304 stainless steel back for island siting	○	○	○	○

### FEATURES AND OPTIONS

	600 H	600 L	600 M	300/300 HL
number of GN2/1 (530 x 650mm) shelves	3	3	3	3
full solid door(s)	○	●	○	-
left hand hinged door	○	○	○	○
half solid door(s)	○	○	○	●
full glass door(s) and lighting*	○	-	-	-
castors 100mm	○	●	○	●
150mm legs (std. on remote)	○	○	○	○
additional nylon coated shelf (GN2/1)	○	○	○	○
integral	○	○	○	○
remote	○	○	○	○

### SERVICE INFO

	600 H	600 L	600 M	300/300 HL
dec ratings (decibels)**	63.5	61.0	-	66.0
refrigerant R134a	○	-	○	●
refrigerant R404a	-	○	-	●
refrigerant R290 (Hydrocarbon)	○	○	○	○
thermal heat rejection	753	1147	753	1340
230v	○	●	○	●
50Hz	○	○	○	○
60Hz	○	○	○	○
1Phase	○	○	○	○
watts	389	709	389	360/530
amps	2.66	3.4	2.66	2.4/2.7
fuse	10	10	10	10/10
drain (50mm)	-	-	-	-
approx. weights (kgs)	110	120	110	130

On Dual temps R134a standard on refrigerator; R404a on freezer.  
 \*Glass door models: 32°C ambient  
 NB: Adequate airflow must be kept above the top of the cabinet: 150mm

\*\*Measured 1m high from the floor and 1m out from the cabinet.



**Foster Refrigerator**  
 Oldmedow Road  
 King's Lynn  
 Norfolk PE30 4JU  
 Tel: 01553 698466  
 Fax: 01553 772504  
 Email: projects@foster-uk.com  
 www.fosterrefrigerator.co.uk